

ASSA ABLOY Panic Exit Device

Features & Benefits

Panic Exit Devices

Key features:

- Surface mounted
- Slim, neat design, surface mounted
- 200,000 cycles tested
- Fire rated
- Wide range of option

Standard & Certification

BS EN 1125
EN1634

Technical details:

- Cross and Push bar
- Modular type – stock reduction
- 1, 2, 3 locking point versions (vertical and lateral) – RIM
- For doors up to 1200 x 2400mm in standard
- Easy installation and adjustment
- Wide range of finishes
- Compatible accessories
- Wide range of outside trims
- Hold Open and Micro switch versions
- Glass door kit
- Certified according to EN 1125:2008
- Durability of 2,00,000 cycles
- For Fire Rated applications (not HO version)
- Suitable for single and double doors

This new range of product is based on a new modular concept and a common design, under a unique platform for both push and cross bar panic exit devices.

Benefits:

- Ease of installation
- Superior aesthetics
- High durability
- Suitable for fire rated doors
- External cylinder and lever option available



Panic Exit Devices

ASSA ABLOY

Experience a safer
and more open world


Panic Exit Devices
standard finishes

Cover & Fix bar		Tube		
		Red (RAL 3000)	Silver (RAL 9006)	S/Steel
		R	G	I
Black (RAL 9000)	N	NR		
Silver (RAL 9006)	G		GG	
S/Steel effect	S			SI
S/Steel	I			II

Push bar:



Cover & Fix bar		Active bar		
		Red (RAL3000)	Silver (RAL 9006)	S/Steel
		R	G	I
Black (RAL 9000)	N	NR		
Silver (RAL 9006)	G		GG	
S/Steel effect	S			SI

Typical door
installation

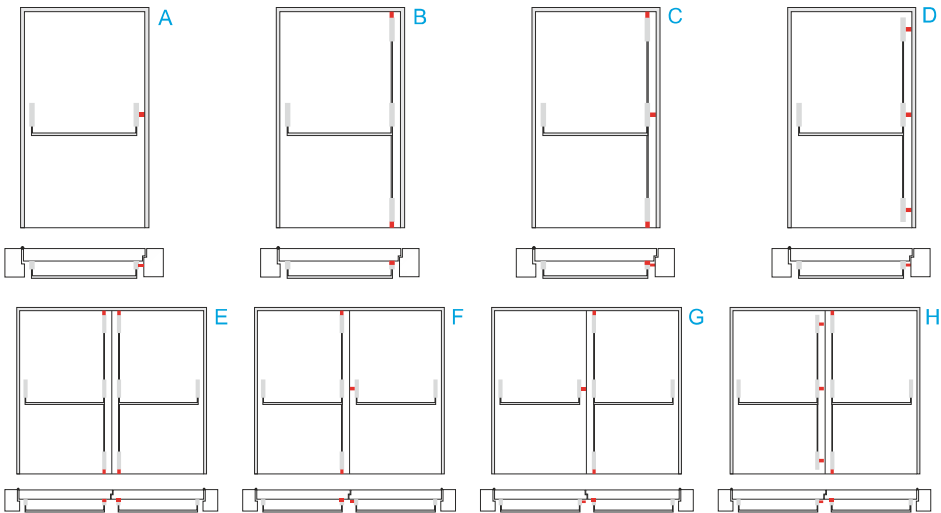

Panic Exit Device
PED 300
Touch Bar - Rim
Device

- ASSA ABLOY PED 300:
- Panic exit device with central locking point - RIM

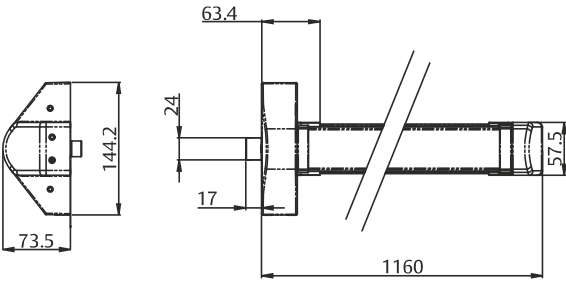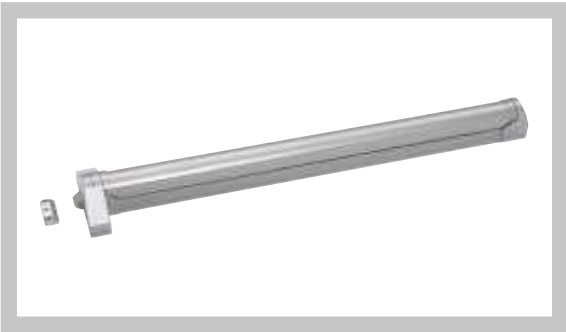

- Panic Exit Device
Characteristics of
PED 300
- Characteristics of PED 300 :
- Modular push bar type
 - For fire and smoke applications
 - High durability 2,00,000 cycles
 - One central locking point
 - For one or double leaf door up to 200 kg
 - For all types of door
 - For doors up to 1200 mm width in standard
 - For doors up to 1400 mm width in option
 - Steel pulman latch in standard
 - Dead latch in standard
 - Steel or zinc alloy swing latch
 - Zinc alloy cover 38 mm width
 - Aluminium touch bar 1046 mm long
 - Bar to be cut
 - 73 mm projection
 - HO function in option
 - Micro switch version in option




Panic Exit Device
PED 300+PED/GV
Touch Bar - Vertical
Device
Vertical locking
points

ASSA ABLOY PED 300:

- Set of 2/3 locking points PED composed of Modular Push Bar and kit for 2 vertical locking points

Characteristics of PED 300:

- Modular push bar type
- For fire and smoke applications
- High durability 2,00,000 cycles
- One central locking point
- For one or double leaf door up to 200 kg
- For all types of door
- For doors up to 1200 mm width in standard
- For doors up to 1400 mm width in option
- Steel pulman latch in standard
- Dead latch in standard
- Steel or zinc alloy swing latch
- Zinc alloy cover 38 mm width
- Aluminium touch bar 1046 mm long
- Bar to be cut
- 73 mm projection
- HO function in option
- Micro switch version in option

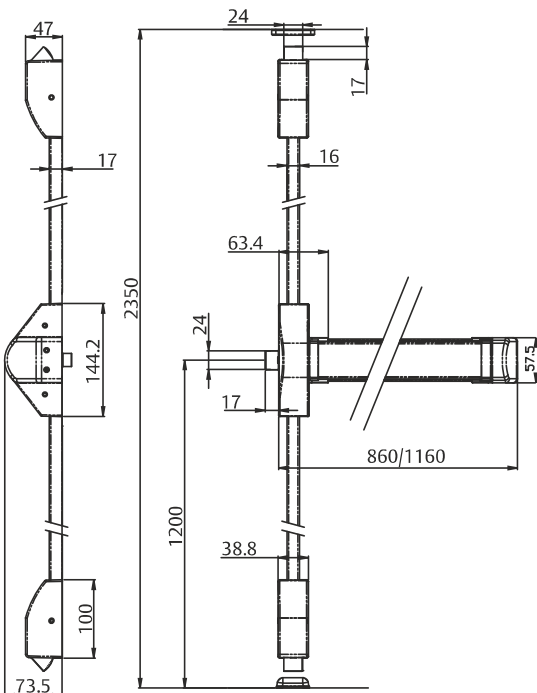

Panic Exit Device
Characteristics of
PED 300+PED/GV


Characteristics of PED 300+PED/GV:

- Set of rods, rod covers and vertical latches
- To fit modular cross bar
- For 2 (top & bottom) vertical locking points installation
- For one or double leaf door
- For doors up to 2350 mm high in standard
- For doors up to 3200 mm high in option
- Steel pulman latches

Panic Exit Device
PED 200
Push Bar - Rim
Device

ASSA ABLOY PED 200:

- Panic exit device with central locking point - RIM

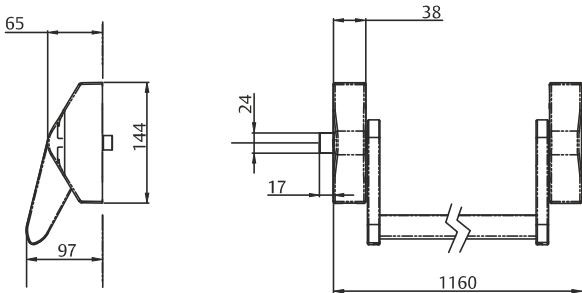

Panic Exit Device
Characteristics of
PED 200

Characteristics of PED 200:

- Modular cross bar type
- For fire and smoke applications
- High durability 2,00,000 cycles
- One central locking point
- For one or double leaf door up to 200 kg
- For all types of door
- For doors up to 1200 mm width in standard
- For doors up to 1400 mm width in option
- Steel pulman latch in standard
- Dead latch in standard
- Zinc alloy or s/steel cover 38 mm width
- Steel or s/steel bar 1075 mm long
- Bar to be cut
- 97 mm projection
- HO function in option
- Micro switch version in option



Panic Exit Device
PED 200 + PED/GV

Push Bar - Vertical
Device
Vertical locking
points


ASSA ABLOY PED 200 + PED/GV:

- Set of 2/3 locking points PED composed of Modular Cross Bar and kit for 2 vertical locking points

- Characteristics of PED 200:
- Modular cross bar type
 - For fire and smoke applications
 - High durability 2,00,000 cycles
 - One central locking point
 - For one or double leaf door up to 200 kg
 - For all types of door
 - For doors up to 1200 mm width in standard
 - For doors up to 1400 mm width in option
 - Dead latch in standard
 - Steel swing latch
 - Zinc alloy or s/steel cover 38 mm length
 - Steel or s/steel bar 1075 mm long
 - Bar to be cut
 - 97 mm projection
 - HO function in option
 - Micro switch version in option

Panic Exit Device
Characteristics of
PED/GV

- Characteristics of PED/GV:
- Set of rods, rod covers and vertical latches
 - To fit modular cross bar
 - For 2 (top & bottom) vertical locking points installation
 - For one or double leaf door
 - For doors up to 2350 mm high in standard
 - For doors up to 3200 mm high in option
 - Steel pulman latches

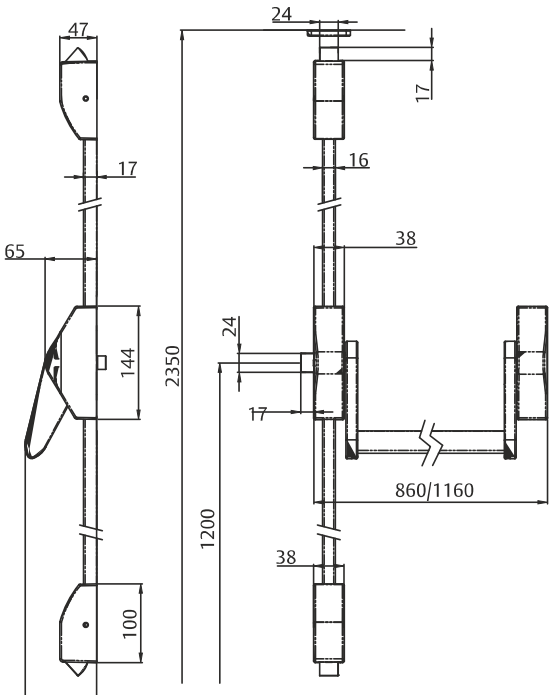

Panic Exit Device
PED 300 / PED 200

Model no.	Description
PED300/--/GG	Panic Exit Device - Touch Bar - 1200mm
PED300/--/GG + PED/GV/G	Panic Exit Device - Touch Bar - 1200mm W/Vertical 2 Pt Locking
PED200/--/GG	Panic Exit Device - Push Bar - 1200mm
PED200/--/GG + PED/GV/G	Panic Exit Device - Push Bar - 1200mm W/Vertical 2 Pt Locking

Panic Exit Trim
Specifications

Outside Device	Blind Plate	Modular Lever Handle
No outside opening	•	•
Free passing door		•
Cylinder locking - knob / lever handle opening		•

Accessories
Micro

Part no.	Description
Microswitch Kit - PED 200	Microswitch Modular Kit for PED 200 Series Panic Device
Microswitch Kit - PED 300	Microswitch Modular Kit for PED 300 Series Panic Device

Panic Exit Trim
OT 200

ASSA ABLOY OT 200:


Finish:

PL: silver

NE: black

SA: s/steel effect

- Specifications:
- Outside trims rim type
 - Same design in various options
 - With or without half euro profile cylinder
 - Standards spindle suitable for doors up to 50 mm thickness

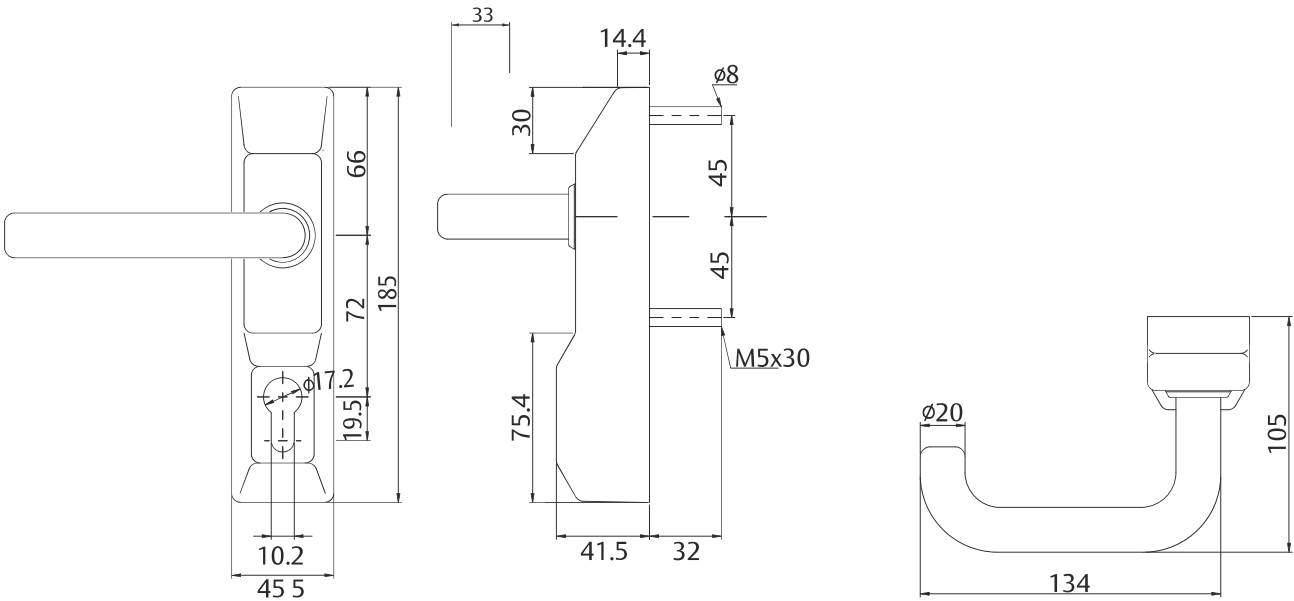

Panic Exit Trim
OT 200

Ordering details

Model no.	Description
PED/A/210/PL	Panic Exit Lever Trim - Passage
PED/A/220/PL	Panic Exit Lever Trim - W/Cylinder Hole
PED/A/230/PL	Panic Exit Knob Trim - W/Cylinder Hole

Panic Exit Devices
AAED400 Series

- Key features:
- Surface mounted, rim type
 - Slim, neat design
 - 500,000 cycles tested
 - Fire rated for 3 hours

- Benefits:
- Ease of installation
 - Superior aesthetics
 - High durability
 - Suitable for fire rated doors
 - External cylinder and lever option available

Standard &
Certification


ANSIA156.3Grade 1

- Technical details:
- Rim type push bar
 - Half length, 1045mm as standard
 - For doors up to 1200 x 2400mm in standard
 - Easy installation and adjustment
 - Compatible accessories
 - UL listed for fire exit hardware up to 3 hours
 - Suitable for single leaf and double leaf doors
 - With satin chrome external lever trim




Panic Exit Device
AAED401

- ASSA ABLOY Exit Device 401:
- Panic exit device with central locking point - RIM
 - Painted galvanized steel or stainless steel finish
 - With AAET411SC external lever trim in satin chrome finish

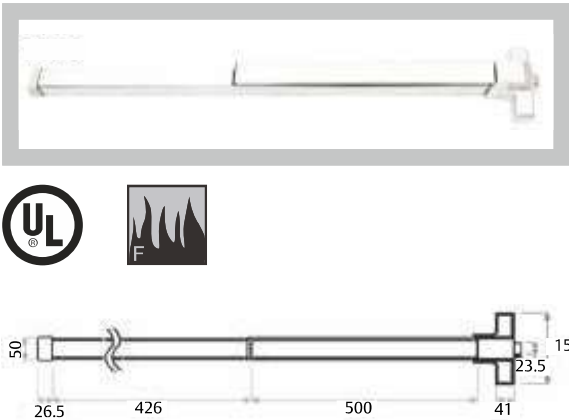


Panic Exit Device
AAED402

- ASSA ABLOY Exit Device 402:
- Panic exit device with double locking points - RIM
 - For standard door height 2400mm
 - Option available for 3000mm door height
 - Painted galvanized steel or stainless steel finish
 - With AAET411SC external lever trim in satin chrome finish

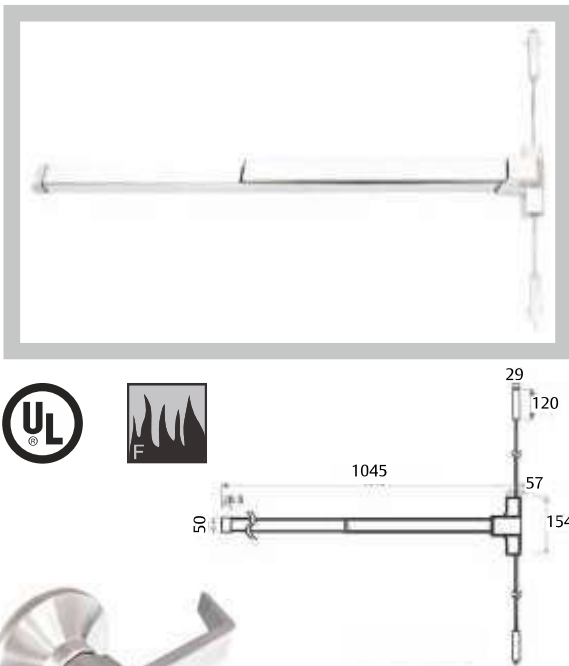

Panic Exit Trim
AAET411SC

- ASSA ABLOY Panic Exit Trim 411:
- Panic exit trim in satin chrome finish

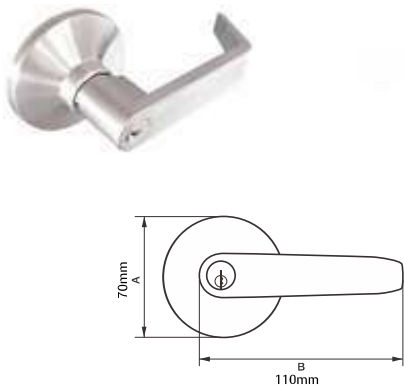

How to Order

Code example
AAED401P

Finish Code
S - Stainless Steel
P - Painted

Locking Code
1 = Single-point locking
2 = Double-point locking

For 3000mm door height, please order AAED402P - 3000
or AAED402SS - 3000

Panic Exit Device
AAPED 500 SERIES
Push Bar - Rim
Device

- Key features:
- Modular cross bar type
 - For fire and smoke applications
 - High durability 2,00,000 cycles
 - One central locking point

- Benefits:
- Ease of installation
 - Superior aesthetics
 - High durability
 - Suitable for fire rated doors
 - External cylinder and lever option available

Standard &
Certification

As per EN1125:2008


- Technical details:
- Rim type Full length push bar
 - For doors up to 1200 x 2400mm in standard
 - Easy installation and adjustment
 - Painted silver finish
 - Compatible accessories
 - Standard euro profile cylinder
 - Suitable for single leaf and double leaf doors



Panic Exit Device
AAPED550D-SP

ASSA ABLOY Exit Device 550D-SP:


- Single point locking
- Has an adapter for 55m and 50m back modules or a handle outside of the door
- Non-handed
- Manufactured according to DIN 4102 norms
- Corrosion-resistant steel body, aluminium alloy brackets, bolts and bar, operating parts are mad of zamak alloys

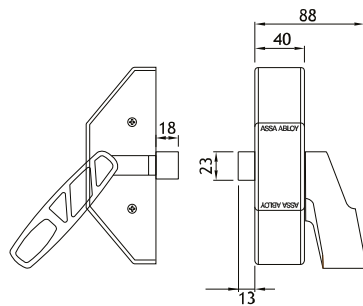

Panic Exit Device
AAPED550E-DP-L/R

ASSA ABLOY Exit Device 502:

- Double point locking
- Can be applied to double leaf doors with 550 C or 550 D
- Non-handed
- Manufactured according to DIN 4102 norms
- Corrosion-resistant steel body, aluminium alloy brackets, bolts and bar, operating parts are mad of zamak alloys

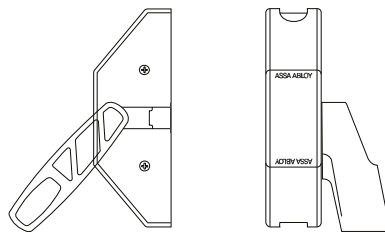

External Trim
AATRIM-550,
AATRIM-550M-E-DP

ASSA ABLOY Exit Device External trim

- Single point locking
- Has an adapter for 55m and 50m back modules or a handle outside of the door
- Non-handed
- Manufactured according to DIN 4102 norms
- Corrosion-resistant steel body, aluminium alloy brackets, bolts and bar, operating parts are mad of zamak alloys

