

## HUSKY 25 & 40

For folding doors and room dividers. Max 25kg or 40kg.

### APPLICATION

- Ideally suited for light to medium weight residential folding partitions
- Concealed fixing
- Suitable for timber, timber framed and composite doors

### DOOR SPECIFICATION

Track System	Husky 25	Husky 40
For Individual Doors:		
Max Door Weight	25kg	40kg
Max Door Width	600mm	750mm
Door Thickness	20-40mm	20-40mm
Max Door Height	2400mm	2400mm


### STANDARD SETS AND PACK

Sets comprise of steel track, hangers, top and bottom pivots, guides (*Husky 40*), hinges, all screws & fitting instructions.


Husky 25 Set No.	Husky 40 Set No.	Track Length	Hardware for
HF25/12	-	1200mm	2 doors
HF25/24	-	2400mm	4 doors ( <i>all 4 doors to one side</i> )
-	HF40/15	1500mm	2 doors
-	HF40/30	3000mm	4 doors ( <i>all 4 doors to one side</i> )
Pack No.		Application	
HF2/25		Two door fittings pack 25kg.	
-	HF2/40	Two door fittings pack 40kg.	
HF4/25		Four door, one end fittings pack 25kg.	
-	HF4/40	Four door, one end fittings pack 40kg.	

### HARDWARE SPECIFICATION

Track	H280	Steel (2000, 3000, 4000 & 6000mm lengths)
	H280A	Aluminium (2000, 3000, 4000 & 6000mm lengths)
	H280AN	Anodised (2000, 3000, 4000 & 6000mm lengths) Soffit fix spacing 275mm centres (maximum)
Pivots	H289T	Top pivot assembly
	H289B	Bottom pivot assembly
Hangers (2 per door)	H283N	Nylon bodied, 4-wheel adjustable hangers ( <i>Husky 25</i> )
	H283	Nylon bodied, needle roller bearing hangers ( <i>Husky 40</i> )
	H312	Bottom socket
	H312W	Bottom socket wall mount
	H313	Top pivot
Hinge	H282HD	Husky butt hinge
	H75X47FHSS	Stainless steel flush hinge
	H90X50FHSS	Stainless steel flush hinge
Guides	H106/HF/94	Roller guide
	H106SL/94	Spring loaded guide
Channels	H81X	Aluminium channel (1200, 1500, 1800, 2400 & 3600mm lengths)
	H94X	Aluminium (2000, 3000, 4000 & 6000mm lengths)
	H94FM	Aluminium (2000, 3000, 4000 & 6000mm lengths)

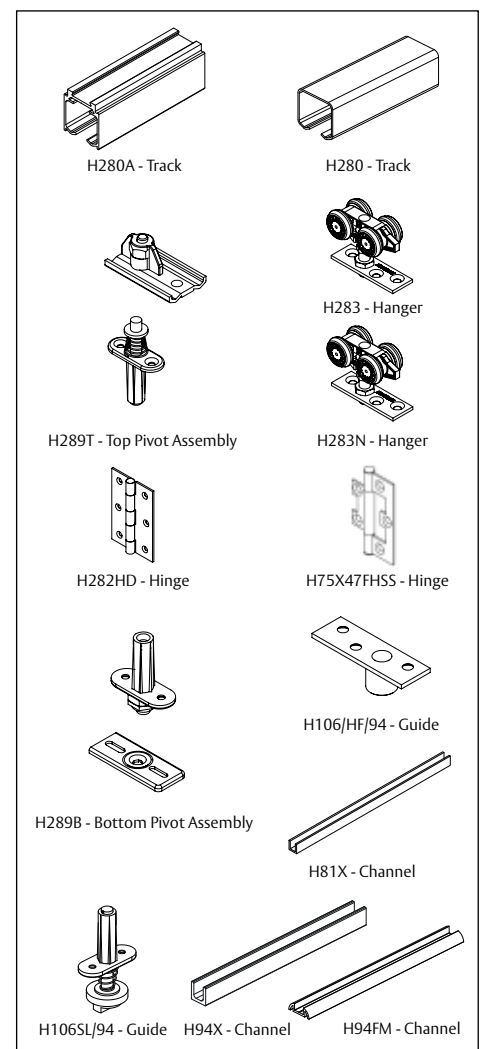

HENDERSON

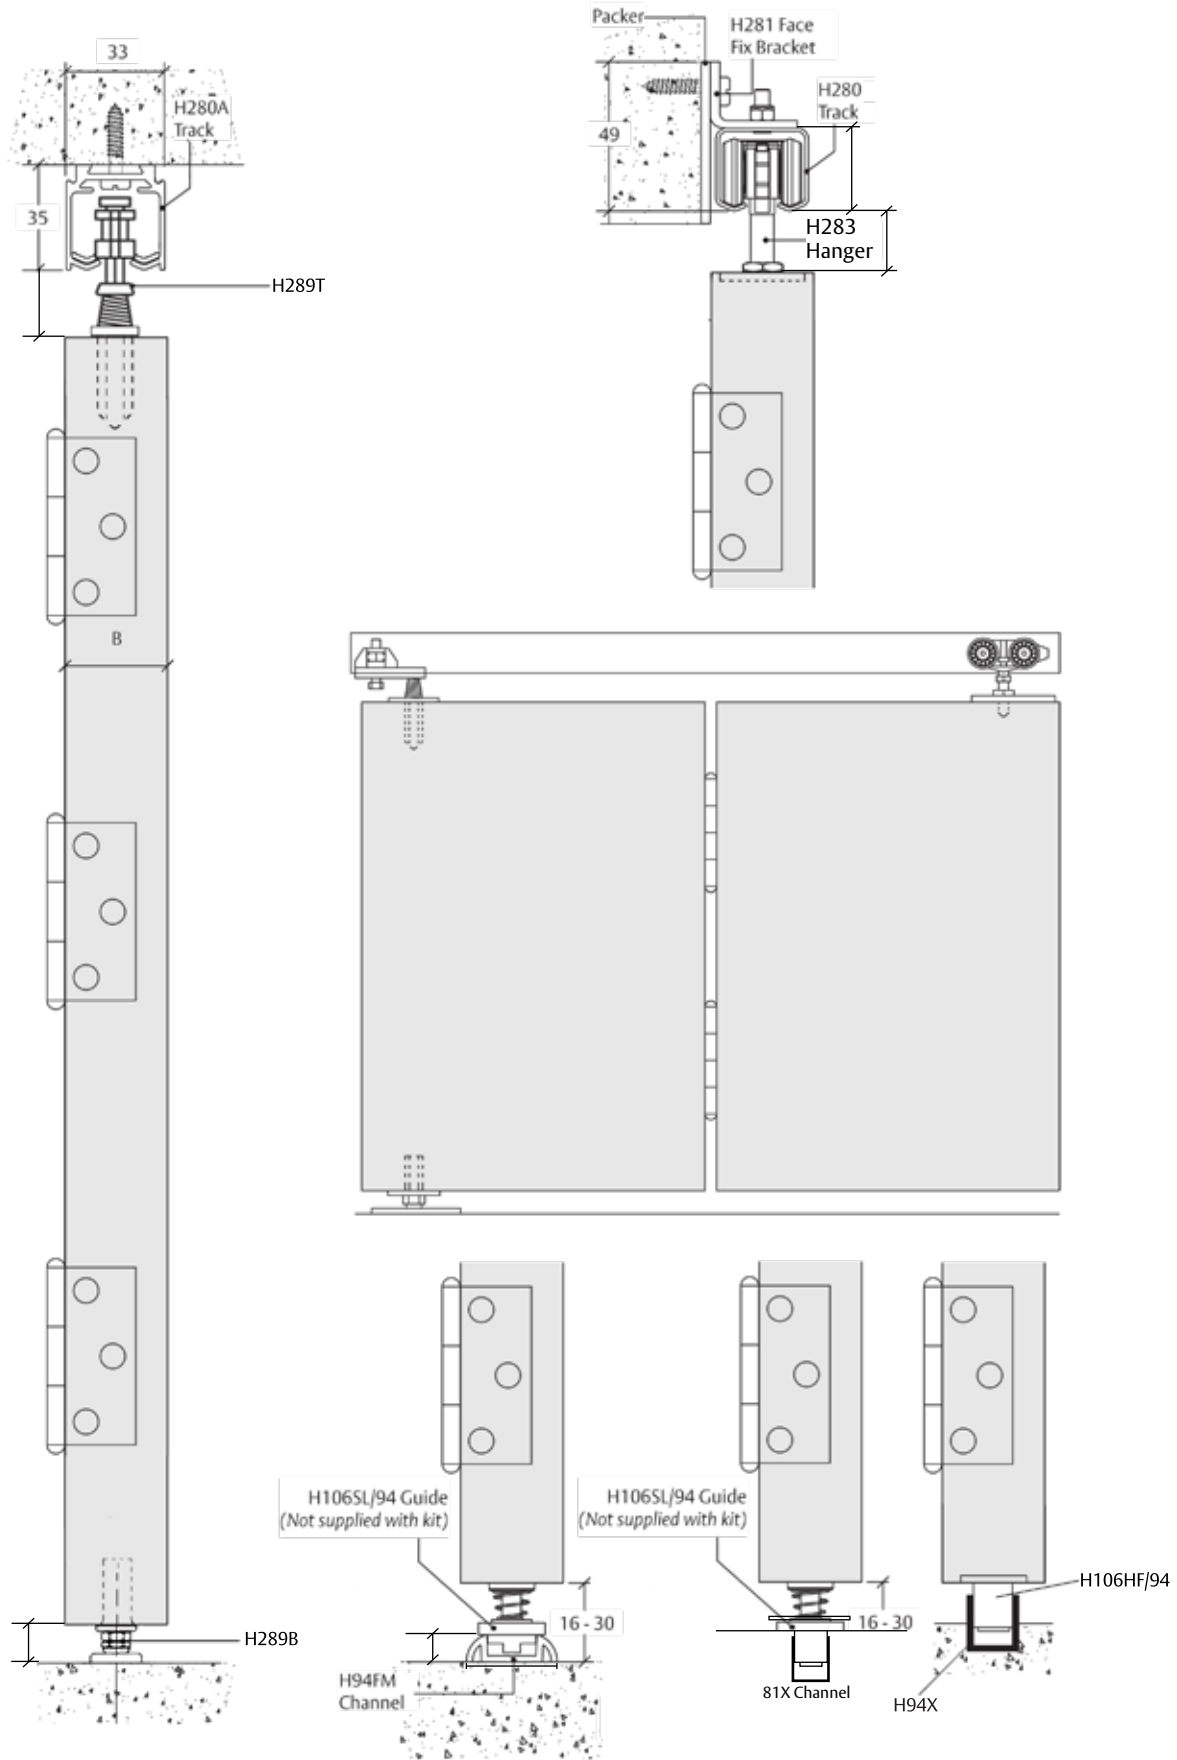

NOT TO SCALE